

8301-AQM1 and 8301-AQM2 Air Quality Monitors

PM, CO₂, Temperature, RH, and TVOC



The Particles Plus® 8301-AQM1 and 8301-AQM2 Handheld Particle Counters were designed for cleanroom monitoring, indoor air quality, industrial hygiene, research, and health & safety applications. Their patented, feature-rich design enables dynamic environmental monitoring and versatile data reporting across multiple industries.

The 8301-AQMs measure particles from 0.3 to 25 µm in six user-selectable channels at a flow rate of 0.1 CFM (2.83 LPM). They offer data reporting in standard cleanroom formats or by mass concentration in µg/m³, with optional density and refractive index corrections. These user-friendly instruments display up to six particle size channels, temperature, relative humidity, and CO₂ (AQM1) or CO₂ + TVOC (AQM2).

With unique features like Particles/Second and the Real-Time Meter, the 8000 Series enables efficient, on-the-go particle investigations across nearly any environment. The instruments can also operate as remote particle counters, leveraging intelligent battery and power conservation modes to achieve up to 100 hours of battery life.







The Particles Plus® standardized hardware and firmware simplify maintenance and reduce the total cost of ownership. Combined with extensive remote diagnostics and a lifetime warranty, the 8301-AQMs ensure industry-leading performance and long-term value.

Features and Benefits

- Stores up to 45,000 sample records, 1,000 sample locations and 50 recipes
- Approximates mass concentration in µg/m³ with density and refractive index corrections
- Large, intuitive color touch screen display with an easy-to-use icon-driven interface
- Resolve issues quickly from any location with internet-enabled remote diagnostics
- Annotation function allows user to save 32 character notations to a live sample record
- Over 10 hours continuous sampling on a single charge
- Integrated handle for one-handed operation
- Common interface ensures ease of use across all products
- Connect using Ethernet, USB, Wi-Fi (optional), RS 485 or RS232
- Displays user-definable reports for ISO 14644-1, EU GMP Annex 1 and FS 209E
- Built-in visual and audible alarms with comprehensive alarm management
- Complies with ISO 21501-4 and JIS B9921 standards
- Easy to clean and wipe down with minimal particle traps
- Equipped with a standard 1/4"-20 female mount for tripod compatibility
- Lightweight high-impact injection molded plastic enclosure
- 2 year Limited Warranty (Extended and Lifetime warranties available)

Specifications

Model	8301-AQM1 and 8301-AQM2
Size Range	0.3 to 25 μm
Size Channels	Factory calibrated at 0.3, 0.5, 1.0, 2.5, 5.0, 10.0 μm variable binning
Flow rates / Accuracy	0.1 CFM (2.83 LPM)
Aerosol Concentration Range	0.01 to 20,000 $\mu\text{g}/\text{m}^3$
Light Source	Long life laser diode
Resolution	0.00003 $\mu\text{g}/\text{m}^3$
Zero Stability	No appreciable drift
Count Modes	Particles/second, Real-Time Meter, cumulative/differential count/ m^3 and count/ ft^3 , and mass concentration
Log Interval	Minimum 1 second with no hold time, maximum 99 hours
Calibration	NIST traceable
Display	4.3" (10.9 cm) WQVGA (480×272) color touch screen
Printer	(Optional) External thermal printer available
Vacuum Source	Internal pump with automatic flow control
Filtered Exhaust	Internal HEPA filter
Number of Channels	6
Custom Size Channels	Calibration for custom size channels available
Audible Alarm	Adjustable integrated alarm
Communication Modes	Ethernet, USB, RS485, RS232, and optional 802.11b/g wireless
Environmental Sensors	Includes NDIR-CO ₂ sensor (0-5000 ppm $\pm 1\%$, resolution 1 ppm, response rate 20 seconds), temperature (32-122°F, $\pm 1^\circ\text{F}$ / 0-50°C, $\pm 0.5^\circ\text{C}$) and relative humidity probe (15-90% RH, $\pm 2\%$)
8301-AQM1	
Environmental Sensors	Includes all sensors in the 8301-AQM1 and PID-TVOC sensor (5 ppb - 50 ppm $\pm 1.5\%$, response rate <3 seconds)
8301-AQM2	
Alarm	Alarms for particle counts (any size channel), sensor failure, environmental sensors, and flow rate
Standards	ISO 21501-4 and JIS B9921
Instrument Calibration	Recommended minimum once per year. Gases, temperature and humidity sensors field calibratable.
External Surface	Lightweight high-impact injection molded plastic enclosure
Dimensions (L x W x H)	6.33 x 4.25 x 12.26 in (16.1 x 10.8 x 31.1 cm) includes handle and does not include probes
Weight	2.5 lb (1.1 kg)
Accessories	User manual + Instrument Management Software (IMS) on USB flash drive, isokinetic probe, temperature relative humidity sensor, purge filter, battery, USB cable, and power supply
Optional Accessories	Printed manual, case, spare battery, external battery charger, external printer, barbed fitting, and tubing
Data Storage	45,000 sample records (rotating buffer) including particle count data, environmental data, locations, annotations, and times. Scrollable on screen or printout.times. Scrollable on screen or printout
Sample Time	1 second to 99 hours
Power	110 to 240 VAC 50/60 Hz universal in-line power supply
Operating Conditions	41-104°F (5-40°C) / 20% to 95% non-condensing
Storage Conditions	32-122°F (0-50°C) / Up to 98% non-condensing
Warranty	2 year Limited Warranty (Extended and Lifetime warranties available)

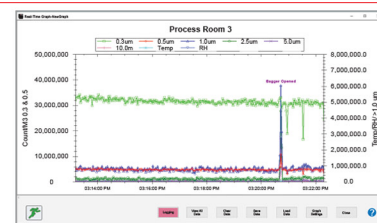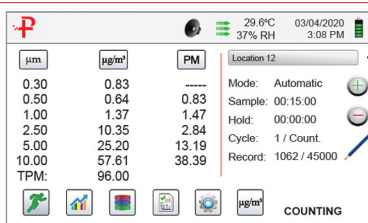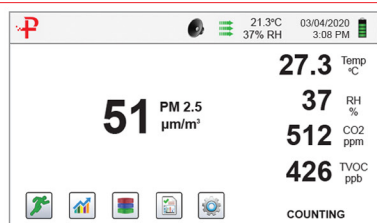

PAT. <https://particlepatents.com/> Additional Patents Pending.
 Particles Plus, Inc. reserves the right to change specifications without notice.
 Contact hello@particlesplus.com or your local distributor for more details.
 Particles Plus and the Particles Plus logo are trademarks of Particles Plus, Inc.
 ©2025 Particles Plus, Inc. All rights reserved.

REV 20250515 8301-AQM1/8301-AQM2



1490 Central Street
 Stoughton, MA 02072 U.S.A.
 +1-781-341-6898
www.particlesplus.com