

5300-AQM1 and 5300-AQM2 Air Quality Monitors

PM, CO₂, Temperature, RH, and TVOC



The Particles Plus® 5300-AQM1 and 5300-AQM2 Remote Particle Counters measure particles from 0.3 to 25.0 µm at a flow rate of 1.2 LPM. These user-friendly instruments display up to six particle size channels, temperature, relative humidity, and CO₂ (AQM1) or CO₂ + TVOC (AQM2).

Designed for research, industrial hygiene, indoor air quality, and cleanroom applications, the 5000 Series offers exceptional versatility. From the cleanest labs to the dirtiest worksites, confidently monitor any environment thanks to the industry's highest particle concentration limits.

One of the key advantages of the 5000 Series as a remote particle counter is its built-in touchscreen display. It provides real-time visual feedback for technicians working in critical areas, enabling immediate identification of elevated particle counts. Adjustable audible alarms offer an additional layer of awareness in critical environments.


Data can be managed directly on the device or through the free Particles Plus® software. Export raw data in .CSV format or generate compliant reports (ISO 14644-1, EU GMP Annex 1, or FS 209E). Remote diagnostics are also available from anywhere with an internet connection. The 5000 Series can function as a fully portable, battery-operated solution or be easily integrated into building automation and cleanroom management systems with multiple communication options.

Features and Benefits


- Measures up to six particle size channels simultaneously
- Long-life laser diode technology for reliable performance
- Approximates mass concentration with density and refractive index corrections
- Large, icon-driven color touchscreen display for easy operation
- Includes temperature and relative humidity probe
- User selectable PM sizes from 0.3 µm to 10 µm including TPM of up to 25.0 µm
- Stores up to 45,000 sample records, 1,000 locations, and 50 sampling recipes
- Annotation feature allows users to save 32-character notes with sample records
- Ethernet, USB, RS485, RS232, and wireless (802.11b/g) communication options
- Troubleshoot and diagnose issues remotely from anywhere with an internet connection
- Generate and export reports for ISO 14644-1, EU GMP Annex 1, and FS 209E
- Built-in audible and visual alarms for real-time alerts
- Complies with ISO 21501-4 and JIS B9921 standards
- Seamlessly integrates into facility monitoring and building automation systems
- Easy to clean, lightweight stainless steel enclosure with minimal particle traps
- 2 Year Limited Warranty (Extended and Lifetime Warranties available)

Specifications


Model	5300-AQM1 and 5300-AQM2
Size Range	0.3 to 25 μm
Size Channels	Factory calibrated at 0.3, 0.5, 1.0, 2.5, 5.0, 10.0 μm variable binning
Flow rates / Accuracy	1.2 LPM \pm 3%
Aerosol Concentration Range	0.01 to 20,000 $\mu\text{g}/\text{m}^3$
Light Source	Long life laser diode
Resolution	0.00003 $\mu\text{g}/\text{m}^3$
Zero Stability	No appreciable drift
Count Modes	Real-Time Meter and graph, cumulative/differential count/ m^3 and count/ ft^3 , and mass concentration (PM)
Log Interval	Minimum 1 second with no hold time, maximum 99 hours
Calibration	NIST traceable
Display	4.3" (10.9 cm) WQVGA (480×272) color touch screen
Printer	(Optional) External thermal printer available
Vacuum Source	Internal pump with automatic flow control
Filtered Exhaust	Internal HEPA filter
Number of Channels	6
Custom Size Channels	Calibration for custom size channels available
Audible Alarm	Adjustable built-in alarm
Communication Modes	Ethernet, USB. (Optional) Wireless 802.11 b/g, RS485 or RS232.
Environmental Sensors 5300-AQM1	Includes NDIR-CO ₂ sensor (0-5000 ppm \pm 1%, resolution 1 ppm, response rate 20 seconds), temperature (32-122°F, \pm 1°F / 0-50°C, \pm 0.5°C) and relative humidity probe (15-90% RH, \pm 2%)
Environmental Sensors 5300-AQM2	Includes all sensors in the 300-AQM1 and PID-TVOC sensor (5 ppb - 50 ppm \pm 1.5%, response rate <3 seconds)
Alarm	Alarms on counts for all particle sizes, low battery, sensor failure, environmental sensors and flow
Standards	ISO 21501-4 and JIS B9921
Instrument Calibration	Recommended minimum once per year. Gases, temperature and humidity sensors field calibratable.
External Surface	Stainless steel
Dimensions (L x W x H)	5.22" x 2.25" x 9.13" (13.3 cm x 5.7 cm x 23.2 cm) includes barb fittings
Weight	4 lb (1.8 kg)
Accessories	User manual + Instrument Management Software (IMS) on USB flash drive, isokinetic probe, temperature relative humidity sensor, purge filter, battery, USB cable, and power supply
Optional Accessories	Printed manual, carrying case, spare battery, external battery charger, external printer, barbed fittings, and sample tubing
Data Storage	45,000 sample records (rotating buffer) including particle count data, environmental data, locations, annotations, and times. Scrollable on screen or printout.
Sample Time	1 second to 99 hours
Power	110 to 240 VAC 50/60 Hz universal in-line power supply
Operating Conditions	41-104°F (5-40°C) / 20% to 95% non-condensing
Storage Conditions	32-122°F (0-50°C) / Up to 98% non-condensing
Warranty	2 Year Limited Warranty (Extended and Lifetime Warranties available)

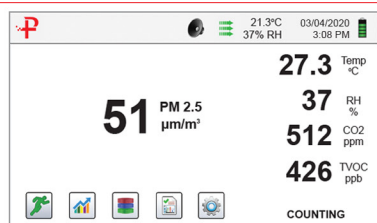




Configurable Environmental Sensor Display

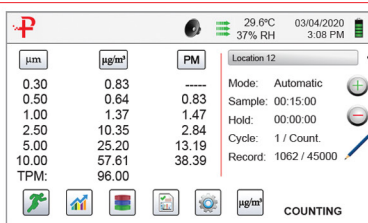

Simultaneous Display of Multiple PM Sizes

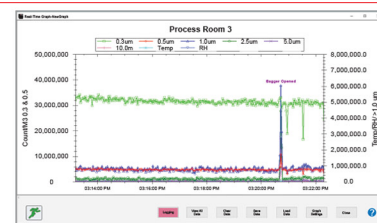

Control and Manage Remotely with IMS

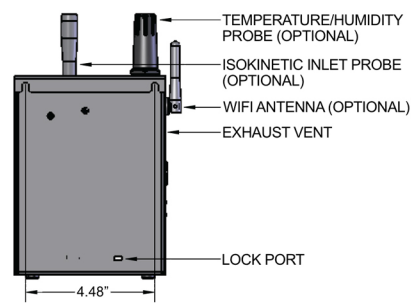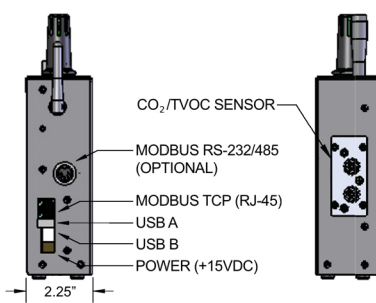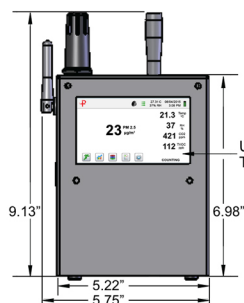

PAT. <https://particlepatents.com/> Additional Patents Pending.
 Particles Plus, Inc. reserves the right to change specifications without notice.
 Contact hello@particlesplus.com or your local distributor for more details.
 Particles Plus and the Particles Plus logo are trademarks of Particles Plus, Inc.
 ©2025 Particles Plus, Inc. All rights reserved.

REV 20250627-5300-AQM1/5300-AQM2



1490 Central Street
 Stoughton, MA 02072 U.S.A.
 +1-781-341-6898
www.particlesplus.com