

7300 Benchtop Airborne Particle Counter

1.2 LPM



The Particles Plus® 7300 Benchtop Particle Counter measures 0.3 µm to 25.0 µm with a flow rate of 1.2 LPM and are purpose-built for ambient and indoor air quality monitoring, industrial hygiene, environmental research, and health & safety applications. Featuring a 1.2 LPM flow rate, the 7300 is optimized for high-concentration environments providing improved accuracy, reduced coincidence loss, and extended instrument lifespan in comparison to higher-flow models.

The 7300 measures particles in six user-selectable channels, with flexible data reporting formats including mass concentration (µg/m³) and corrections for density and refractive index. Integrated sensors for temperature and relative humidity, and optional CO2 and TVOC, offer comprehensive environmental data alongside particle measurements.

With unique features like Particles/Second and the Real-Time Meter, the 7300 enables efficient, on-the-go particle investigations across nearly any environment. The instrument can also operate as a remote particle counter, leveraging its intelligent battery and power conservation modes to achieve up to 100 hours of battery life.

Its compact design, durable hardware, and long-life pump allows the 7300 to offer a cost-effective and reliable solution for continuous and remote monitoring. Its standardized architecture and remote diagnostic capabilities reduce maintenance and ensure long-term performance across a wide range of indoor and outdoor air quality applications.


Features and Benefits

- Stores up to 45,000 sample records, 1,000 sample locations and 50 recipes
- Long life laser diode technology for reliable performance
- Approximates mass concentration in µg/m³ with density and refractive index corrections
- User selectable PM sizes from 0.3 or 0.5 µm to 10 µm including TPM of up to 25.0 µm
- Large, intuitive color touch screen display with an easy-to-use icon-driven interface
- Temperature and relative humidity probe included
- Resolve issues quickly from any location with internet-enabled remote diagnostics
- Annotation function allows user to save 32 character notations to a live sample record
- Over 10 hours continuous sampling on a single charge
- Integrated handle for one-handed operation
- Common interface ensures ease of use across all products
- Connect using Ethernet, USB, Wi-Fi (optional), RS 485 or RS232
- Displays user-definable reports for ISO 14644-1, EU GMP Annex 1 and FS 209E
- Built-in visual and audible alarms with comprehensive alarm management
- Complies with ISO 21501-4 and JIS B9921 standards
- Equipped with a standard 1/4"-20 female mount for tripod mounting
- Easy to clean, lightweight stainless steel enclosure with minimal particle traps
- 2 year Limited Warranty (Extended and Lifetime warranties available)

Specifications

Model	7300
Size Range	0.3 to 25 μm
Size Channels	Factory calibrated at 0.3, 0.5, 1.0, 2.5, 5.0, 10.0 μm variable binning
Flow rates	1.2 LPM
Concentration Limits	27,000,000 particles/ ft^3 @ 10% coincidence (per ISO 21501-4), 50,000,000 particles/ ft^3 @ 10% coincidence (as tested and validated ¹)
Aerosol Concentration Range	0.01 to 20,000 $\mu\text{g}/\text{m}^3$
Battery Run Time	>10 hours continuous operation
Light Source	Long life laser diode
Counting Efficiency	50% @ 0.3 μm ; 100% for particles >0.45 μm per JIS
Zero Count	<1 count / 60 minutes (<1 particles / 6 ft^3). No fault count subtraction.
Count Modes	Particles/second, Real-Time Meter, cumulative/diff. (count/ m^3 and count/ ft^3) and mass concentration (PM)
Count Alarms	1 to 9,999,999 counts
Calibration	NIST traceable
Display	4.3" (10.9 cm) WQVGA (480×272) color touch screen
Printer (Optional)	External thermal printer available
Vacuum Source	Internal pump with automatic flow control
Filtered Exhaust	Internal HEPA filter
Number of Channels	6
Custom Size Channels	Calibration for custom size channels available
Audible Alarm	Adjustable integrated alarm
Battery	Removable Li-ion (Recharge time: 4 hours or <2 hours with external battery charger)
Exportable Data Reports	ISO 14644-1, EU GMP Annex 1, FS 209E
Recipes	50 user-configurable recipes
Communication Modes	Ethernet, USB, Wireless 802.11 b/g (Optional), RS485 or RS232
Environmental Sensor	Includes temperature (32-122°F, $\pm 1^\circ\text{F}$ / 0-50°C, $\pm 0.5^\circ\text{C}$) and relative humidity probe (15-90% RH, $\pm 2\%$)
Alarm	Alarms for particle counts (any size channel), sensor failure, environmental sensors, and flow rate
Standards	ISO 21501-4 and JIS B9921
Calibration	Recommended minimum once per year
External Surface	Stainless steel
Dimensions (L x W x H)	5.22 x 3.81 x 9.42 in (14.0 x 9.7 x 23.9 cm) includes barb fittings
Weight	4 lb (1.8 kg)
Accessories	User manual + Instrument Management Software (IMS) on USB flash drive, isokinetic probe, temperature relative humidity sensor, zero-count filter, battery, USB cable, and power supply
Optional Accessories	Printed manual, spare battery, external battery charger, external printer and isokinetic probes
Buffer Memory	Securely stores up to 45,000 records with particle counts, environmental data, locations, and timestamps
Sample Locations	Up to 1,000 locations 20 characters long
Sample Time	1 second to 99 hours
Power	110 to 240 VAC 50/60 Hz universal in-line power supply
Operating Conditions	41-104°F (5-40°C) / 20% to 95% non-condensing
Storage Conditions	32-122°F (0-50°C) / Up to 98% non-condensing
Warranty	2 Year Limited Warranty (Extended and Lifetime Warranties available)

1- Validated by independent analysis see paper available at www.particlesplus.com/aac2022_paper

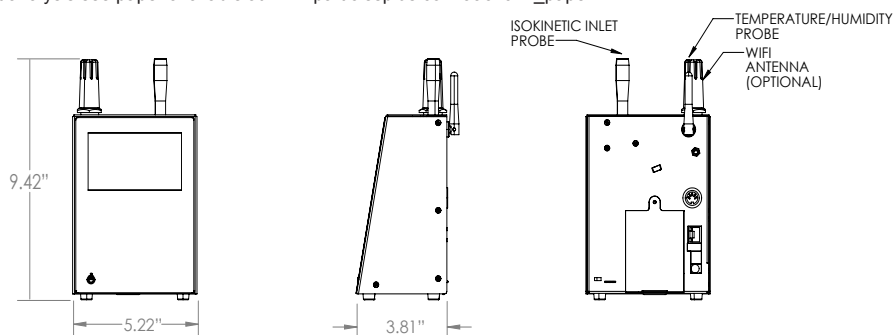

PAT. <https://particlepatents.com/> Additional Patents Pending.
 Particles Plus, Inc. reserves the right to change specifications without notice.
 Contact hello@particlesplus.com or your local distributor for more details.
 Particles Plus and the Particles Plus logo are trademarks of Particles Plus, Inc.
 ©2025 Particles Plus, Inc. All rights reserved.

REV 20250728-7300



1490 Central Street
 Stoughton, MA 02072 U.S.A.
 +1-781-341-6898
www.particlesplus.com